

Control several indoor units with one outdoor unit. Build the system you desire.

If you want to keep a large floor as well as many rooms comfortable, we recommend to use our Multi-split to build a compact system using just one outdoor unit. Choose from a large lineup of indoor units, which match up well to your rooms. You can mix and match them as you like. Build the system that is just right for you.

MULTI-SPLIT



High energy saving


With the adoption of a high-efficiency DC twin-rotary compressor, all models achieved an energy efficiency scale of A+++ for cooling and A++ for heating.



SEER
8.7 *

SCOP
4.7

*: 2-unit 14 class

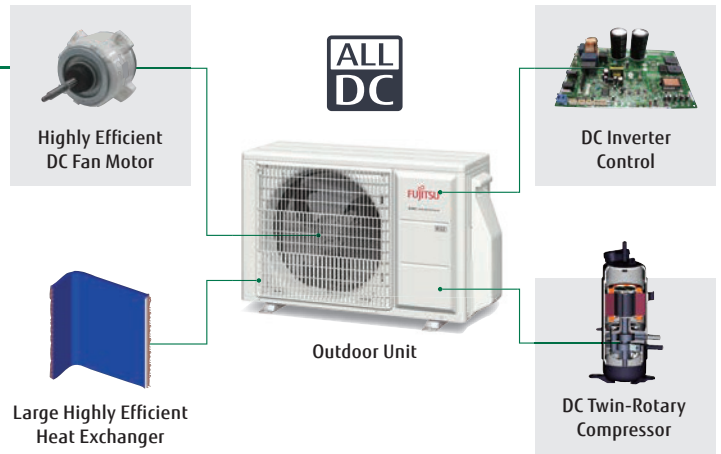

R32 refrigerant model

In addition to its high energy efficiency, the R32 refrigerant has a larger volumetric capacity than the R410A refrigerant, which means the R32 refrigerant models require less refrigerant charge than the R410A models.


	Pre-charge refrigerant amount (kg)	
	REFRIGERANT R32	REFRIGERANT R410A
2-unit 14 class	0.9	1.25
2-unit 18 class	1.02	1.30
3-unit 18 class	1.8	2.2
3-unit 24 class	1.8	2.2
4-unit 30 class	2.2	3.3
5-unit 36 class	2.5	4.0

Quiet operation

The sound power level is reduced by up to 7 dB compared to the current R410 models.

Sound Power Level

*3-unit 24 class (cooling)

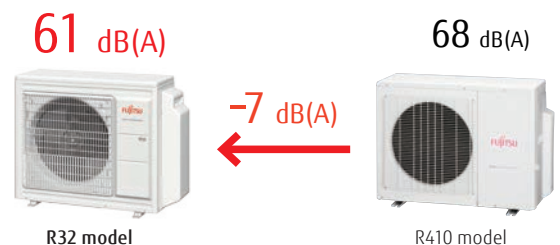


Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.



Compact design

Unlike a single type, the outdoor unit can be installed in the most space-saving location.

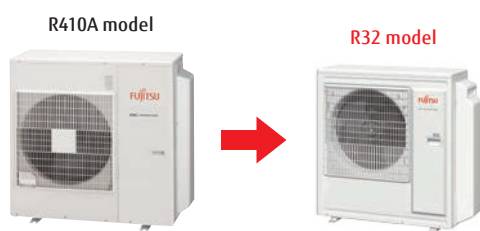


Depth difference
-15.5 % !*

Space requirement
-36.2 % !*

*: Compared with current 5-unit multi models


Easy evacuation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

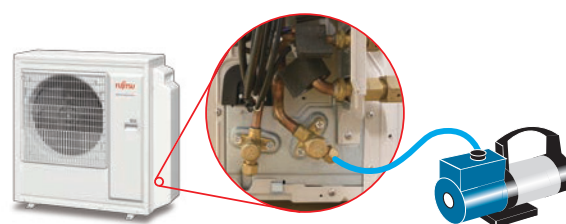

Wide range of indoor units with various models

We offer 41 models in 5 types in a capacity range from 2.0 kW to 6.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels

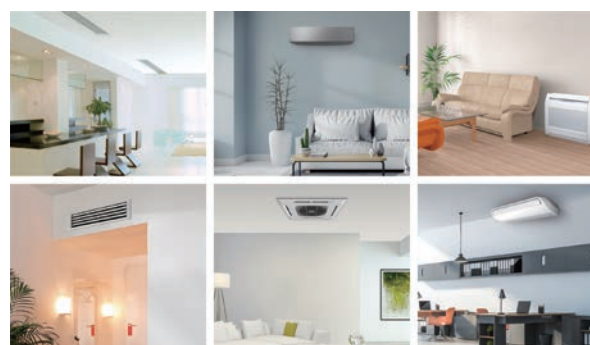

Models equipped with the New R32 Refrigerant

Wall-mounted type with sophisticated design

Designer Series



Cool Beauty Design
07/09/12/14 kBTU



High Spec & Design
07/09/12/14 kBTU

Standard Series



High Efficiency & Comfort
07/09/12/14 kBTU



High Efficiency & Large Rooms
18/22/24 kBTU

Middle and small capacity models are available. This makes installation easier in small spaces.



Mini Duct
07/09/12/14/18 kBTU



Slim Duct
07/09/12/14/18 kBTU



Medium static
pressure duct
22 kBTU



Compact Cassette
07/09/12/14/18/22 kBTU



Floor
09/12/14/ kBTU



Ceiling
18/22 kBTU

MULTI-SPLIT

2-unit: AOYG14KBTA2/AOYG18KBTA2

3-unit: AOYG18KBTA3/AOYG24KBTA3

4-unit: AOYG30KBTA4

5-unit: AOYG36KBTA5



Specifications (2-unit)

Model name			AOYG14KBTA2	AOYG18KBTA2
Power Source			Single phase, ~230 V, 50 Hz	
Rated Capacity (Min. - Max.)	Cooling	kW	4.0 (1.4-4.6)	5.0 (1.7-5.8)
	Heating		4.4 (1.1-5.5)	5.6 (1.8-6.6)
EER	Cooling	W/W	4.12	4.03
	Heating		4.63	4.59
Sound Pressure Level (High)	Cooling	dB(A)	47	47
	Heating		49	50
Sound Power Level (High)	Cooling		60	60
	Heating		62	62
Airflow Rate	Cooling/Heating	m ³ /h	1,670/1,670	1,960/2,020
Net Dimensions H × W × D		mm	542 × 799 × 290	632 × 799 × 290
Weight		kg (lbs)	33 (73)	37 (82)
Connection Pipe Diameter	Liquid	mm	6.35 × 2	6.35 × 2
	Gas		9.52 × 2	9.52 × 2
Max. Pipe Length		Total/Each	30/20	30/20
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit	m	15	15
	Between Indoor Units		10	10
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)	kg (CO ₂ eq-T)	R32 (675)	R32 (675)
	Charge		0.9 (0.608)	1.02 (0.689)

Specifications (3-unit)

Model name			AOYG18KBTA3	AOYG24KBTA3
Power Source			Single phase, ~230 V, 50 Hz	
Rated Capacity (Min. - Max.)	Cooling	kW	5.4 (1.8-7.0)	6.8 (1.8-8.5)
	Heating		6.8 (2.0-8.0)	8.0 (2.0-9.2)
EER	Cooling	W/W	4.78	3.90
	Heating		4.89	4.40
Sound Pressure Level (High)	Cooling	dB(A)	46	48
	Heating		49	53
Sound Power Level (High)	Cooling		59	61
	Heating		61	67
Airflow Rate	Cooling/Heating	m ³ /h	2,220/2,160	2,270/2,730
Net Dimensions H × W × D		mm	716 × 820 × 315	716 × 820 × 315
Weight		kg (lbs)	46 (102)	46 (102)
Connection Pipe Diameter	Liquid	mm	6.35 × 3	6.35 × 3
	Gas		9.52 × 3	9.52 × 2, 12.70 × 1 adapter [12.70 → 9.52] × 1
Max. Pipe Length		Total/Each	50/25	50/25
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit	m	15	15
	Between Indoor Units		10	10
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)	kg (CO ₂ eq-T)	R32 (675)	R32 (675)
	Charge		1.8 (1.215)	1.8 (1.215)

Specifications (4-unit, 5-unit)

Model name			AOYG30KBTA4	AOYG36KBTA5
Power Source			Single phase, ~230 V, 50 Hz	
Rated Capacity (Min. - Max.)	Cooling	kW	8.0 (2.4-10.1)	9.5 (3.0-11.0)
	Heating		9.6 (3.0-11.2)	10.6 (3.5-12.0)
EER	Cooling	W/W	3.90	3.80
	Heating		4.55	4.50
Sound Pressure Level (High)	Cooling	dB(A)	50	52
	Heating		54	55
Sound Power Level (High)	Cooling		63	65
	Heating		66	68
Airflow Rate	Cooling/Heating	m ³ /h	2,400/2,950	2,450/2,900
Net Dimensions H × W × D		mm	884 × 820 × 315	884 × 820 × 315
Weight		kg (lbs)	55 (121)	59 (130)
Connection Pipe Diameter	Liquid	mm	6.35 × 4	6.35 × 5
	Gas		9.52 × 2, 12.70 × 2 adapter [12.70 → 9.52] × 2	9.52 × 3, 12.70 × 2 adapter [12.70 → 9.52] × 2 adapter [9.52 → 12.70] × 1
Max. Pipe Length*		Total/Each	70/25	75/25
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit	m	15	15
	Between Indoor Units		10	10
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)	kg (CO ₂ eq-T)	R32 (675)	R32 (675)
	Charge		2.2 (1.485)	2.5 (1.688)

*Length not applicable when floor units are connected. For details, refer to the installation manual.

Multi-split

Indoor Units Specifications



Wall mounted



Model No.	Indoor unit			ASYG07KGTB	ASYG09KGTB	ASYG12KGTB	ASYG14KGTB
kW Class			kW	2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270	770/600/450/280
	Heating			720/580/460/330	750/610/470/330	770/640/520/330	800/660/520/340
Net Dimensions			mm	270x834x215	270x834x215	270x834x215	270x834x215
Weight			kg (lbs)	10 (22)	10 (22)	10 (22)	10 (22)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Wall mounted

NEW



NEW



Model No.	Indoor unit			ASYG07KETA ASYG07KETA-B	ASYG09KETA ASYG09KETA-B	ASYG12KETA ASYG12KETA-B	ASYG14KETA ASYG14KETA-B
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	55	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270	770/600/450/280
	Heating			720/580/460/330	750/610/470/330	770/640/520/330	800/660/520/340
Net Dimensions			mm	295×950 (wall side : 840)×230			
Weight			kg(lbs)	11(24)	11(24)	11(24)	11.5(25)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Wall mounted

NEW



Model No.	Indoor unit			ASYG07KMCC	ASYG09KMCC	ASYG12KMCC	ASYG14KMCC
kW Class			kW	2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	55	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/320	700/560/430/320	700/560/430/320	770/600/450/310
	Heating			720/580/460/330	750/610/470/330	780/640/520/330	820/660/520/340
Net Dimensions			mm	270x834x222	270x834x222	270x834x222	270x834x222
Weight			kg(lbs)	10 (22)	10 (22)	10 (22)	10 (22)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52



Compact cassette Grid type

Model No.	Indoor unit			AUXG07KVLA	AUXG09KVLA	AUXG12KVLA	AUXG14KVLA
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/34/31/28	38/35/32/29
	Heating			34/32/29/27	34/32/29/27	37/34/31/29	43/38/34/30
Sound Power Level	Cooling	H	dB(A)	46	46	49	50
	Heating			47	47	49	55
Airflow Rate	Cooling	H/M/L/Q	m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	790/680/580/450
Net Dimensions		mm		245x570x570	245x570x570	245x570x570	245x570x570
Weight		kg(lbs)		15 (33)	15 (33)	15 (33)	15 (33)
Panel				UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Mini duct



Model No.	Indoor unit			ARXG07KSLAP	ARXG09KSLAP	ARXG12KSLAP	ARXG14KSLAP
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23
Sound Power Level	Cooling	H	dB(A)	52	54	55	60
	Heating			53	56	57	62
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360
Net Dimensions			mm	198x700x450	198x700x450	198x700x450	198x700x450
Weight			kg(lbs)	15.5 (34)	15.5 (34)	15.5 (34)	15.5 (34)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
External static pressure			Pa	0 to 30	0 to 30	0 to 30	0 to 50
Drain pump				Standard			

Slim duct




Model No.	Indoor unit			ARXG07KLLAP	ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26
	Heating			28/26/25/24	28/26/25/24	29/28/27/24	32/30/28/25
Sound Power Level	Cooling	H	dB(A)	57	57	58	60
	Heating			57	57	58	60
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480
Net Dimensions			mm	198x700x620	198x700x620	198x700x620	198x700x620
Weight			kg(lbs)	16 (35)	17 (37)	17 (37)	17 (37)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
External static pressure			Pa	0 to 90	0 to 90	0 to 90	0 to 90
Drain pump				Standard			




30 Anos na climatização e tratamento de ar

video 2"



video 7"



Delegação de Lisboa
Tel: 219 151 792
lisboa@megaclima.pt

Delegação de Queluz
Tel: 21 925 00 28
queluz@megaclima.pt

Serviços Centrais

Rua Francisco Ribeirinho, 28

Centro Empresarial Abrunheira
Abrunheira 2710-736 Sintra
www.megaclima.pt

— Escritório 11
Tel: 219 253 300
geral@megaclima.pt